

The transmitter measures the pressure by the use of a diaphragm that transfers the force onto a ceramic fulcrum lever. The signal is temperature compensated and calibrated. The microprocessor samples the pressure once per second. It calculates an averaging signal over a preset number of seconds and generates an output signal based on minimum and maximum pressure values.



Features

- ◆ Pressure measurement from 300 Pa up to 5kPa
- ◆ Programmable pressure display range
- ◆ Minimum and maximum pressure memory
- ◆ 0...10V or 0...20mA measuring signals, selectable with jumpers
- ◆ Signal range programmable
- ◆ Selectable averaging signal


Applications

- ◆ Pressure measurement in the field of heating, ventilation and air conditioning.
- ◆ Measuring of air flow velocity
- ◆ Measuring and control of positive or negative pressure for example for clean rooms.
- ◆ Measure exactly the range you need
- ◆ Recording of minimum and maximum values for critical environments
- ◆ Supervision of critical pressures


Minimum and Maximum Values

Using the programming tool, the user has the option to read out and reset minimum and maximum values. The minimum and maximum values may be sent to the output using OP00. This way the sensor may be used to supervise the temperature for critical environments. The minimum and maximum values are saved into the EEPROM every minute. They will still be available after a power failure.

Dimensional Drawing

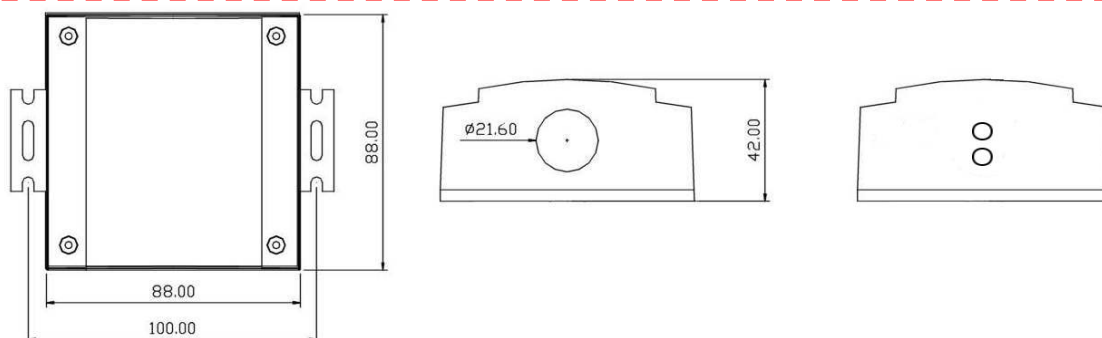

Specifications

Power Supply	Operating Voltage	24 V AC 50/60 Hz \pm 10%, 24VDC \pm 10%				
	Power Consumption	Max 2 VA				
	Electrical Connection	Terminal Connectors				
Sensing Probe	Product type	SDA-P 1	SDA-P 2	SDA-P 3	SDA-P 4	SDA-P 5
	Pressure Range	300 Pa	500 Pa	1kPa	3kPa	5kPa
	Linearity	\pm 0.5 %	\pm 0.5 %	\pm 0.3 %	\pm 0.3 %	\pm 0.3 %
	Hysteresis	0.5%	0.4%	0.3%	0.2%	0.2%
	Stability over 1 year	0.5%	0.5%	0.5%	0.5%	0.5%
	Diaphragm:	Silicone polymer (LSR)				
	Pressure Sensing element	Ceramic Fulcrum Lever				
	Temperature coefficient sensitivity and zero point	\pm 0.04%/°C				
Connection	Connection Terminals	2.5 mm ²				
Signal Outputs	Analog Outputs					
	Output Signal	DC 0-10V or 0...20mA				
	Resolution	10 Bit, 9.7 mV, 0.019.5 mA				
	Accuracy	\pm 2%				
	Maximum Load	20 mA, 500 Ω				
Environment	Operation	To IEC 721-3-3				
	Climatic Conditions	class 3 K5				
	Temperature	-40...70°C				
	Humidity	<95% r.h.				
	Transport & Storage	To IEC 721-3-2 and IEC 721-3-1				
	Climatic Conditions	class 3 K3 and class 1 K3				
	Temperature	-40...80°C				
	Humidity	<95% r.h.				
	Mechanical Conditions	class 2M2				
Housing Materials	Cover & Mounting Plate	Fire proof ABS plastic				
Standards	 conform according to EMC Standard 89/336/EEC EMEI Standard 73/23/EEC	EN 61 000-6-1/ EN 61 000-6-3				
	Product standards					
	Automatic electrical controls for household and similar use	EN 60 730 -1				
	Special requirement on temperature dependent controls	EN 60 730 - 2 - 9				
	Degree of Protection	IP43 to EN 60 529				
	Safety Class	III (IEC 60536)				
General	Dimensions [mm]	42 x 112 x 88 (H x W x D)				
	Weight (including package)	178g				

Order Information

Item Name	Description/Option	
SDA-P1		Pressure range 0...300 Pa
SDA-P2		Pressure range 0...500 Pa
SDA-P3		Pressure range 0...1 kPa
SDA-P4		Pressure range 0...3 kPa
SDA-P5		Pressure range 0...5 kPa
SDA-Px		Standard: 2...10V DC output signal
SDA-PX- W	0	Output Signal: 2...10V DC/ 4...20mA
	1	Output Signal: 0...10V DC/ 0...20mA
	2	Output Signal: Special – Specify